


Plastic Rectangular -Q07

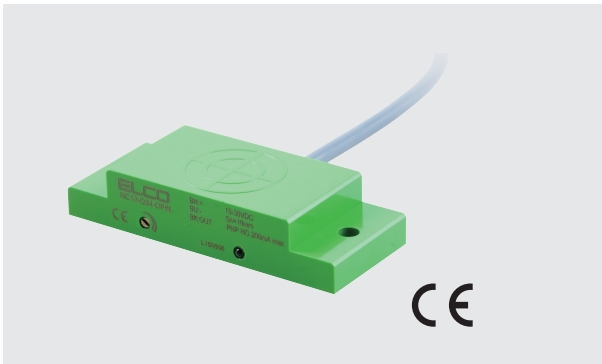

Description:

Plastic housing, rectangular 50x20x10mm, DC 3-wire output, potentiometer adjustment, IP67 protection class, LED indicator.

Technical Data:

Type	Rated Operating Distance Sn	Mounting	Output	Voltage Range U_b	Rated Current	Switching Frequency	Ambient Temperature	Connection	Fig
NC10-Q34-OP6L	10mm	Non-flush	PNP NO	10...30VDC	≤200mA	30Hz	-25...70°C	2m cable	Fig.1
NC10-Q34-ON6L	10mm	Non-flush	NPN NO	10...30VDC	≤200mA	30Hz	-25...70°C	2m cable	Fig.1
NC10-Q34-CP6L	10mm	Non-flush	PNP NC	10...30VDC	≤200mA	30Hz	-25...70°C	2m cable	Fig.1
NC10-Q34-CN6L	10mm	Non-flush	NPN NC	10...30VDC	≤200mA	30Hz	-25...70°C	2m cable	Fig.1

Dimensions:

Fig.1

